

Clausing 10" (254mm) & 13" (330mm) Automatic Bandsaw



Features:

- Variable speed drive
- LED blade speed display
- Precise cut off length setting
- Auto head-elevation and quick approach control
- Piece counter with auto shutoff
- Multiple stroke counter for long pieces, 9 -15.75" (230-400mm) strokes standard
- Amplify valve/auto adjust cut feed rate
- Power-driven blade cleaning brush and coolant cleaning flush hose
- Idle wheel motion detector provides auto shutoff for blade jams or breakage
- Carbide and roller blade guides
- Shuttle vise back-jaw feed method (no need for front stop)
- Split vise allows cutting to within 2" (50mm) of bar end, automatically
- Unique two-way vise jaw
- Hydraulic blade tension control
- Light to show cutting area
- Floating, two way open, rear vice jaws
- Guarded blades and wheel covers
- Blade, tools and tool box and manual
- Two (2) year limited warranty



Specifications	BS250HAS	BS300HAS
Drive Motor*	3 Hp, (2.2kw) 230/460v	5 Hp, (3.7kw) 230/460v
Hydraulic Motor	1 Hp (.75kw)	1 Hp (.75kw)
Hydraulic oil capacity	9.3 gallons (35 liters)	9.3 gallons (35 liters)
Bandwheel Dia.	16.5" (420mm)	16.5" (420mm)
Blade Speeds	65-260 f/min (20-80 m/min) Variable Speed	
Blade	1.25" x .042" x 12' (32 x 1 x 3658mm)	1.25" x .042" x 12'-6.5" (32 x 1 x 3823mm)
Coolant	Recirculating	Recirculating
Coolant Capacity	15 gallons (57 liters)	15 gallons (57 liters)
Vise Opening	12.5" (318mm)	13.78" (350mm)
90° Cutting Capacity		
Round	10.5" (268mm)	13" (330mm)
Square	10" x 10" (254 x 254mm)	12" x 12" (305 x 305mm)
Rectangular	12" x 7" (305 x 178mm)	13.5" x 9.84" (343 x 250mm)
Bundle Cutting**	8" x 5.5" (203 x 140mm)	10" x 6.5" (254 x 165mm)
Feed Length/Index	15.75" (400mm)	15.75" (400mm)
Max. Feed (9 times)	141.75" (3600mm)	141.75" (3600mm)
Height (head-up) (A)	62" (1575mm)	75" (1905mm)
Height (head-down) (B)	45" (1143mm)	51" (1295mm)
Width (C)	69" (1753mm)	74" (1880mm)
Base Width (D)	50" (1270mm)	55" (1397mm)
Bed Height (E)	22" (560mm)	23" (585mm)
Base Depth (F)	29" (737mm)	29" (737mm)
Depth (G)	44.17" (1120mm)	44.17" (1120mm)
Depth (H)***	77" (1955mm)	77" (1955mm)
Net Weight	2,795 lbs (1269kg)	2,895 lbs (1313kg)
Shipping Weight	3,295 lbs (1495kg)	3,395 lbs (1540kg)

Cutting Capacities:

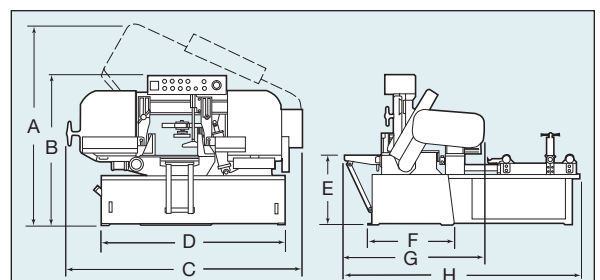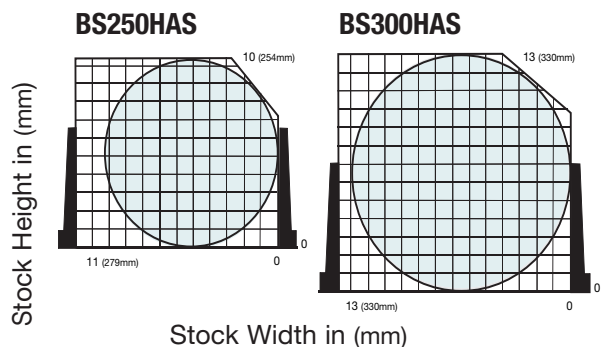

*Other voltages optional. **With optional Bundle Clamp.

*** Depth with optional infeed roller table. Specifications are subject to change without notice.